

The **MULTIWELD 250T-C** is a compact three-phase generator combining **MIG/MAG**, cored wire and **MMA** welding processes. Its intuitive interface integrates digital displays for easy and precise settings. With a reinforced structure including 2 handles for lifting and slinging, the **MULTIWELD 250T-C** is perfectly suited for welding in the workshop and on site use.

MULTIPROCESS

MIG/MAG welding :

- steel wire: Ø 0.6 to 1.2 mm
- stainless steel wire: Ø 0.8 to 1.2 mm
- aluminium wire: Ø 0.8 and 1.0 mm
- cored wire (reverse polarity): Ø 0.9 to 1.2 mm

MMA welding: basic and rutile electrodes (up to Ø 5 mm).

OPTIMISED MIG/MAG SETTINGS

- **Choice of the trigger mode:** 2T or 4T.
- **Welding aid:** table on the side of the generator to help the user adjust his tension and filler wire diameter according to the thickness of the material to be welded.

INTUITIVE

- Display readable even in bright light.
- **Simple interface** with large buttons and knobs for use with gloved hands.

INTEGRATED WIRE FEEDER

- Compatible wire reels: Ø 200 / 300 mm.
- Powerful 4 roller motorized wire-feeder for an efficient wire feeding.
- EURO torch connector for quick assembly/disassembly.

PRE-HEATING, PURE CO2

- Pre-installed socket (36 V - 4.2 A) for gas heater in pure CO2 welding (heater not included).
- Compatible with US (type A) and EURO electrical sockets (type C/E/F).

ROBUST

- Reinforced structure.
- 2 steel handles for easy manipulation.

ACCESSORIES (option)

STEEL / STAINLESS STEEL		ALUMINIUM	
250 A (60%)	250 A (60%)	250 A (60%)	250 A (60%)
3 m	4 m	3 m	4 m
040700	040922	040724	040939

	Earth clamp 400 A - 4 m - 35 mm ² 043817
---	---


	Electrode holder 200 A - 4 m - 25 mm ² 043855
---	--



	Rollers type A	
STEEL / STAINLESS STEEL	Ø 0.6 / 0.8	042339
	Ø 0.8 / 1.0	041189
ALUMINIUM	Ø 0.8 / 1.0	041196
	Ø 0.8 / 0.9	046856
Cored wire	Ø 0.9 / 1.2	042346

	Trolley JOB SITE XL 039568
---	-------------------------------

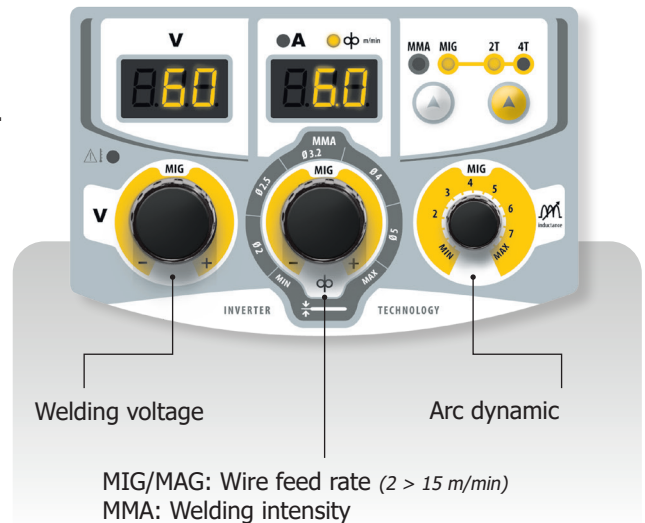

Supplied without accessories (014572)



50/60 Hz	A	I ₂ MMA	I ₂ MIG	GAZ	NO GAZ	200	300	Ø mm	Electronic Control	m/min	équipé d'origine / original equipment / originalausstattung / equipamiento de fabrica	EN 60974-1 (40°C)	U ₀	cm	kg	IP	Protected & compatible power generator (+/-15%)
50/60 Hz	A	A	A	GAZ	NO GAZ	200	300	Ø mm	Electronic Control	m/min	0.8	X (40°C)	V	cm	kg	IP	Protected & compatible power generator (+/-15%)
400V 3~	16	40 → 220	40 → 250	0.6	0.9	✓	✓	1.6 → 5		2.0	0.8	170A @ 60%	59	58 x 52 x 32	32	IP 21	10 kVA
				1.2	1.2					15.0	1.0	130A @ 100%					