BATTERY **CHARGER**

GYSFLASH 7A

Ref. 029187

12V




The GYSFLASH 7A is an automatic charger designed to charge or maintain 12V batteries (liquid or gel). It is powerful, compact, light and water proof.

• Ensures an automatic charge up to 100% without 1,9m 🗨 supervision. Ideal for lawn mowers, bikes, cars, vans, boats, trucks, etc... 1901 • Charges from as low as 1 volt. • Examples of use: - Charger for car/bike 12V battery - Maintenance/wintering 1,9m - Battery recovery (for sulphated 12V batteries) • Protection for on-board electronics of your car. Protection against short circuits/ polarity reversals/ overvoltage COLD CHARGE Anti-spark system IP 65 • Adapted to marine application, it doesn't create any ALL BATTERIES galvanic current (current which electrolyzes the water and corrodes the hull).

Specific charge for cold temperatures

 Supplied with 2 quick connection kits WATERPROOF (clamps and terminals). Cables with specific terminal connections to fix permanently 0,4m to the vehicle, allows you to connect the charger quickly.

CHARGING CURVE

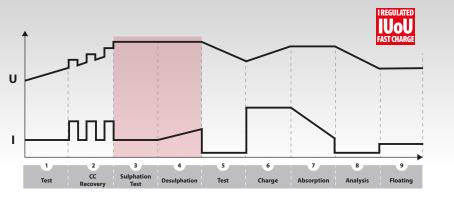

- **1** Short circuit test of the battery
- 2 Recovery mode for damaged cells
- 3 Sulphation test
- **4** Desulphation/Recovery of the battery
- **5** Recovery test
- 6 Charge up to 80%
- **7** Charge up to 100%
- 8 Analysis of battery charge
- 9 Floating mode

| | 50 / 60 Hz | | alto | START MINI | CHARGE | | Moyen / | Boost | Equalize / Absorption | | Floating | t | 2 | |
|---|------------|-------|--------|---------------|------------|-------------|-----------------------|-------|-----------------------|------------------|----------|-----------------------|---------|--|
| | | | | | On board | Maintenance | Average (EN 60335) | DUUSL | | | rivating | | \cup | |
| | 230 V | 12 V | 120 W | 1 V | 1.2>130 Ah | 1.2>230 Ah | 0.8 - 5 A | 7 A | 14.4 V (T>0°) | 14.7 V (T<0°) | 13.6V | 38,5 x 20,5 x 7 cm | 1.06 kg | |
| (| | 60331 | 5-7-79 | | | | MADE in FRANCE | | | | | | | |