

# MIG LIFT COMPACT & PRO

Ref. 046597 (Compact)  
Ref. 046429 (Pro)



Adjustable balancing arms for semi-automatic welding stations. Equipped with an arm and a guiding lever, the MIG LIFTs reduce the user's physical effort and help prevent repetitive strain injury (RSI) by supporting the weight of the torch and wire feeder (PRO version). Can be used with non GYS wire feeders using the optional universal support.

## BENEFITS

### ● For the welder :

- ✔ Offers greater mobility.
- ✔ Reduces effort.
- ✔ Makes welding easier.
- ✔ Free up floor space.

### ● For the torch :

- ✔ Maintains the torch in a straight line.
- ✔ Prevents dragging on the ground.
- ✔ Less likely to drop torch.
- ✔ Longer torch life.




**Option :** Universal support for mig lift pro: can use any wire feeder ref.046436

## SPECIFICATIONS


### ● MIG Lift PRO :

Length : adjustable up to 2.50 m  
Rotation : 360°

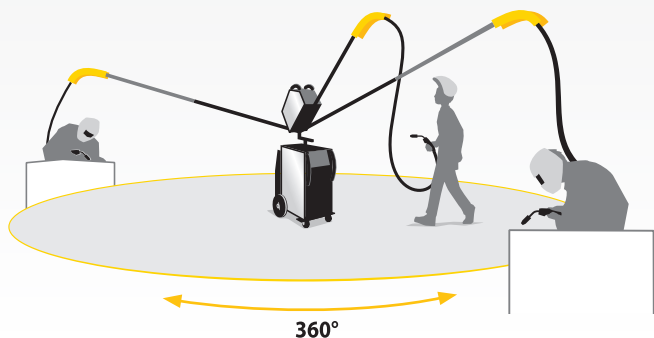

### ● MIG Lift COMPACT :

Length : adjustable up to 1.30 m  
Rotation : 180°

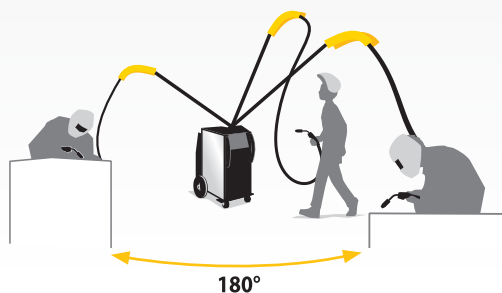

## COMPATIBILITY

|                         | Length adjustable | Rotation | Torch compatible |                 | Compatibility  |      |      |          |               |             |             |              |                  |                  |                       |                 |                             |                  |   |   |
|-------------------------|-------------------|----------|------------------|-----------------|----------------|------|------|----------|---------------|-------------|-------------|--------------|------------------|------------------|-----------------------|-----------------|-----------------------------|------------------|---|---|
|                         |                   |          |                  |                 | KRONOS / ARKAD |      |      |          |               |             |             | NEOMIG-i     |                  | EXAGON GENIUS    | NEOPULSE / PULSEMIG   |                 |                             |                  |   |   |
|                         |                   |          | Normal           | Fume extraction | 250M           | 250T | 320T | 400T DUO | 400T DUO + WF | 400T W + WF | 400T G + WF | 400T GW + WF | 400 G +WF        | 500 G +WF        | + Separate wirefeeder | 400 CW          | 400 G + Separate wirefeeder | 500 G            |   |   |
| <b>MIG LIFT COMPACT</b> | 1.3 m max         | 180°     | ✔                | —               | ✔              | ✔    | ✔    | ✔        | —             | —           | —           | —            | —                | —                | —                     | + option 072237 | ✔                           | —                | — |   |
| <b>MIG LIFT PRO</b>     | 2.5 m max         | 360°     | ✔                | ✔               | —              | —    | —    | —        | ✔             | ✔           | ✔           | ✔            | + trolley 077522 | + trolley 077522 | + trolley 077522      | —               | —                           | + trolley 077522 | ✔ | ✔ |