


The blind rivet adapter is compatible with both the GYSPRESS riveters. Its tensile force is 24 kN. It allows the setting of blind rivets with diameters from 4.0 to 7.8 mm for aluminium and 4.0 to 6.4 mm for steel.

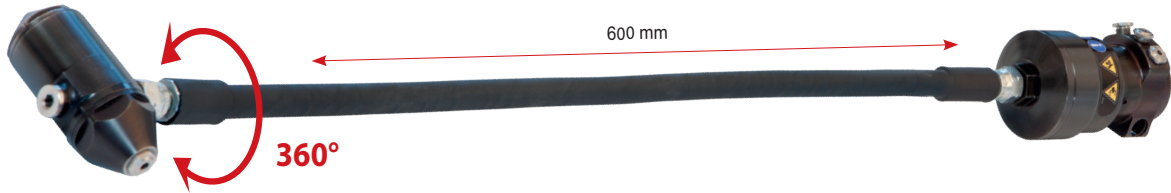

ADVANTAGES

- **360° rotation** for greater accessibility.
- **Flexible at 90°**, the head can be used in difficult areas of access.
- **Versatile** thanks to its different diameter nozzles.
- **Robust** due to its steel structure.

FITTING CAPACITY

+ Blind rivets

Aluminium: Ø 4.0 to 7.8 mm
Steel: 4.0 to 6.4 mm


+ Rivets RIBE

COMPATIBILITY

This adapter is compatible with all GYS riveting machines :

 **GYSPRESS | PUSH-PULL | CONTROL**

+ ACCESSORIES (INCLUDED)



1 Set of jaws containing 3 pieces
réf. 058446




Nozzles

Ø 3.2 ref. 059221
Ø 3.6 ref. 059238
Ø 4.0 ref. 059245
Ø 4.5 ref. 059252

Storage space nozzles on the adapter



+ OPTION




Rivet extraction nozzle for 20 & 24 kN adaptors

réf. 064683

+ GYSPRESS



GYSPRESS 8T PUSH-PULL
058446

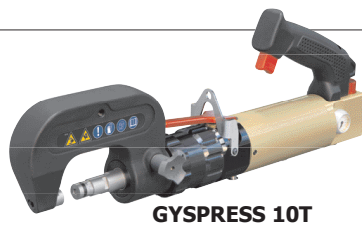

GYSPRESS 10T
063303



GYSPRESS 10T PUSH-PULL
063853

Pressure max.		mm/kg
GYSPRESS 10T	GYSPRESS 8T	
24 kN 7 bars	20 kN 8 bars	65 x 65 x 760 / 2.2