



**This traditional battery charger can charge 12V and 24V lead-acid or calcium batteries for small cars, vans and agricultural vehicles.**

- To charge lead acid batteries with liquid electrolyte:

- 12V: from 35 to 210 Ah
- 24V: from 20 to 100 Ah


- Ammeter to indicate the charge

- 2 charge speeds: Normal and "Boost".



- Copper wound transformer
- Clamp cables 1.5m
- Power supply cable 1.3m

## TECHNOLOGY

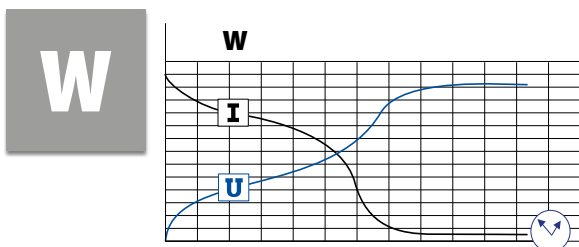

## GENERAL PROTECTION



- Thermal protection of the transformer
- Protection against polarity reversal with a 20A automotive fuse at the front.
- Isolated clamps
- Metallic casing

CE - EN 60335-2-29

50-60hz	260W	12V 24V	Reg 2 2	EFFICACE / RMS 18A 9A	Moyen/Average (EN 60335)		fuse	cm	kg
					Reg 1	Reg 2			
230V					8A	12A	20A	22.5x33.5x14.5	5.2
					4A	6A			

Made in China

[www.gys.fr](http://www.gys.fr)