

# POWERMIG 200-4 400V - 3 Φ

MIG-MAG / 30 ▷ 200A

Ref. 034754



The POWERMIG 200-4 is a « synergic » three phase welding unit, ideal for maintenance and locksmith work. It can weld steel, stainless, aluminium, and it is particularly suitable for intensive professional work up to Ø1.

## PRODUCT

In « Synergic » mode, setting is fast and simple. The Micro processor controller will automatically set the optimum wire speed. This avoids complex set-up and ensures optimum welding parameters.

## 3 FUNCTIONS AVAILABLE

- **Normal**
- **Spot:** Spot welding with adjustable spot diameter
- **Delay:** « Chain spot » function (Spot welding with time adjustment between 2 spots).

## SYNERGIC MODE FOR EASY AND QUICK SETTINGS

- **With this function, the wire speed setting is Automatic.**

Simply select:


- the wire type
- the wire Ø
- the power

POWERMIG 200-4 sets the optimum wire speed for you.

- **Save the last settings.**



- Included :
- 1 torch 250 A (3m)
  - Earth clamp (2m)

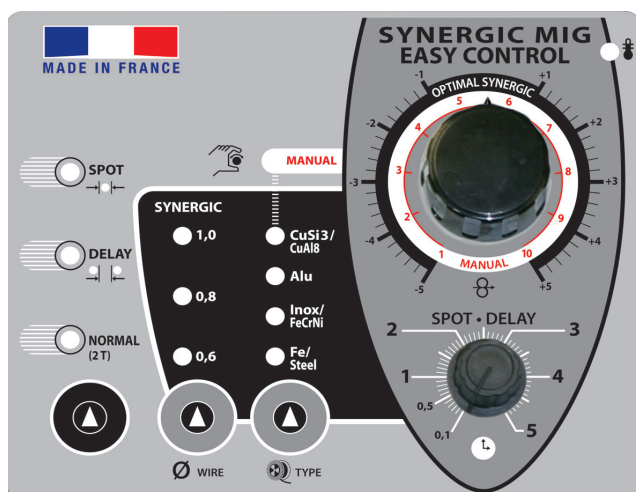

## ACCESSORIES

### Torch MB25 kit (250A) (Not included)



Ref. 041233

Composition:

- Contact tips:
  - Ø0,8 M6 steel/stainless (x 5)
  - Ø1,0 M6 steel/stainless (x 5)
  - Ø1,0 M6 Alu (x 5)
- Contact tips supports 250A (x 3)
- Springs for nozzle (x 5)
- Nozzles 250A (x 3)

CE - EN 60974-1

50/60hz	AM	min▷max	GAS NO GAS	100 200 300	Electronic Control	équipé d'origine / original equipment / originalausstattung / equipamiento de fabrica	EN60974-1 (40°C)	I <sub>a</sub> (60%) X% (I <sub>z</sub> max)	U <sub>0</sub>	cm/kg	Protected & compatible POWER GENERATOR (+/- 15%)
400V 3~	10A	30-200A	0.6 - 1.0	-	✓ ✓	⚡	0.8/1.0 1.0	140A 200A 30%	17V 34.5V	47x77x79 / 63	7.5 kVA