

POWERMIG 250-4 DV 230/400V - 3 Φ

MIG-MAG / 35 ▷ 250A

Ref. 034761



The POWERMIG 250-4 DV 230-400V is a « synergic » three phase welding unit, ideal for maintenance and locksmith work. It can weld steel, stainless, aluminium, and it is particularly suitable for intensive professional work up to $\varnothing 1.2$.

PRODUCT

In « Synergic » mode, setting is fast and simple. The Micro processor controller will automatically set the optimum wire speed. This avoids complex set-up and ensures optimum welding parameters.

3 FUNCTIONS AVAILABLE

- **2T** : 2 stroke welding.
- **4T** : 4 stroke welding, to weld during a long period without constantly pressing the trigger.
- **Spot** : for plug welding.

SYNERGIC MODE FOR EASY AND QUICK SETTINGS

- With this function, the wire speed setting is Automatic.

Simply select:


- the wire type
- the wire \varnothing
- the power

POWERMIG 250-4 DV 230/400V sets the optimum wire speed for you.

- Save the last settings.



- Included :
- 1 torch 250 A (3m)
 - Earth clamp (4m)

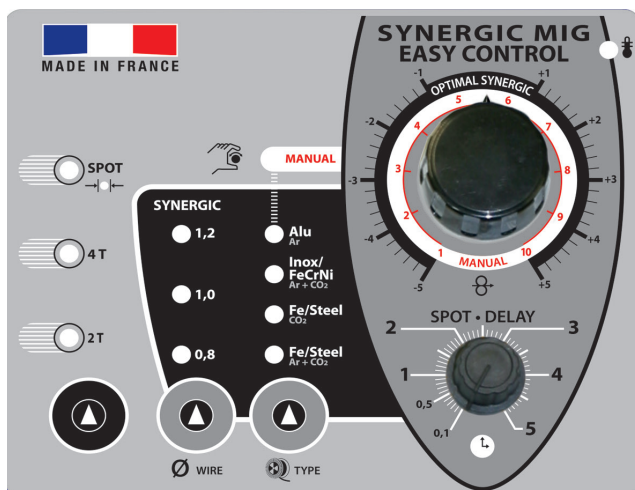

ACCESSORIES

Torch MB25 kit (250A) (Not included)



Ref. 041233

Composition:

- Contact tips:
 - $\varnothing 0,8$ M6 steel/stainless (x 5)
 - $\varnothing 1,0$ M6 steel/stainless (x 5)
 - $\varnothing 1,0$ M6 Alu (x 5)
- Contact tips supports 250A (x 3)
- Springs for nozzle (x 5)
- Nozzles 250A (x 3)

50/60hz	AM	min > max	GAS	NO GAS	100	200	300	Electronic Control	équipé d'origine / original equipment / originalausstattung / equipamiento de fabrica	EN60974-1 (40°C)	I _A (60%)	X% (I _z max)	U ₀	cm/kg	Protected & compatible POWER GENERATOR (+/- 15%)
400V - 3~	10A	35-250A	0.8	-	-	✓	✓	3 Φ	0.8/1.0	1.0	180A	250A 30%	17V	50x90x88 / 86	10 kVA
230V - 3~	16A		1.2	-	-								37V		