



INVEST IN THE FUTURE



Made in France
since 1964



PLASMA cutting and gouging systems

Plasma cutting is one of the most widely used processes in metallurgy and manufacturing. Its cutting speed and precision often give it the edge over flame cutting.



PLASMA TECHNOLOGY

Plasma cutting is a localised, fusion-cutting process in which the compressed jet of air pushes the metal to a melting temperature.

GYS systems are portable and easy to use, with even higher cutting speeds than flame cutting. Due to its versatility, plasma technology offers the possibility of cutting a wide variety of conductive materials up to a thickness of 57 mm.

Main uses and applications:

- Cuts a variety of conductive materials including mild steel, carbon steel, stainless steel, aluminium, copper, brass and other ferrous materials.
- Straight / bevelled cut
- Automated cutting
- Highly accurate gouging
- Drilling
- Sheet metal marking

OXYCUTTING technology

The equipment is simple and the user can be up and running quickly. However, this process is rather slow and only suitable for cutting carbon steel. Oxy-gas is not effective on other types of metal such as stainless steel or aluminium. What's more, the workpiece must be preheated before cutting, which further reduces productivity. Safety concerns arise from the use of acetylene, which is highly flammable and unstable (this combustible gas is most commonly used with flame cutting)

Main uses and applications:

- Cutting steel for manufacturing or dismantling it.
- Heating parts for bending, straightening, heat treatment.
- Loosening jammed or rusted parts and bolts

FOUR CUTTING ADVANTAGES



Cutting quality

Plasma cuts produce less slag (burrs).



Easy to use

No gas to adjust, no flame to control.



Productivity

Cuts more parts, faster and with fewer secondary operations.



Safety

No flammable gas required, uses only compressed air.



MECHANISED CNC CUTTING

The term «CNC» refers to «Computer Numerical Control». The torch's movement is controlled by a computer on the cutting table using a computer program.

Three advantages of automated cutting:

- Consistent and reliable performance
- Increased productivity
- Optimised cutting quality

More information?



There's more information in the brochure

PLASMA CUTTING		OXYCUTTING
Material(s)	Conductive metals (Steel, Aluminium, Copper, Brass)	Carbon steel only
Thickness	Up to 57 mm	Up to 50 cm
Cutting quality	Excellent cutting angularity Small heat-affected area.	Good cutting angularity Large heat-affected area
Productivity	Fast cutting speed on all thicknesses.	Slow cutting speed. <i>(The preheating time increases the cutting time).</i>
Secondary operations	Minimal slag	Grinding and removal of surface oxidation almost always required.
Operating costs	Inexpensive (£)	Very expensive (£££)
Equipment cost	Expensive (££)	Inexpensive (£)
Portability	Yes	Yes
Gouging	Yes, very accurate	Yes
Safety	★★★	★

MANUAL CUTTING



EASYCUT 25 | EASYCUT K25 | EASYCUT K35 PFC | EASYCUT 30 FV | EASYCUT 40

Max. output current	25 A	25 A	35 A	30 A	40 A
Mains voltage	230 V - 1~	230 V - 1~	230 V - 1~	110/230 V - 1~	230 V - 1~
Performance de coupe (mm) Separation	8	8	15	15	20
	Steel	6	10	10	15
	Drilling	-	-	-	-
Mechanised cutting		-	-	-	-
Internal compressor		-		-	-
Automatic air pressure control		-	-	-	-
Marking		-	-	-	-
Gouging		-	-	-	-
Protection rating	IP 21	IP 21S	IP 23S	IP 21S	IP 21
Weight (kg)	7.8	15	18.5	11	8
Part no. with accessories*	065543	068063	080768	013858	029743

*Power source + earth clamp
+ hand-held torch

MANUAL OR MECHANISED CUTTING



CUTTER 45 CT | CUTTER 70 CT | NEOCUT 105 | NEOCUT 125

Max. output current	45 A	70 A	105 A	125 A
Mains voltage	110 V 1~	230 V 1~	400 V - 3~	400 V - 3~
Performance de coupe (mm) Separation	15	30	35	40
	Steel	10	25	35
	Drilling	5	12	20
Mechanised cutting				
Internal compressor		-	-	-
Automatic air pressure control		-	-	
Marking		-	-	
Gouging		-		
Protection rating	IP 23	IP 23	IP 23	IP 23
Weight (kg)	15	22	33	36
Part no. with accessories*	062962	013841	063112	067448

*Power source + earth clamp
+ hand-held torch MT-70 or MT-125

Glossary

Discover the technological features of our products as well as a brief explanation.



Power Factor Correction (PFC)

PFC technology suppresses spikes and regulates the supply current. The electrical network is therefore better used, accepting supply voltages between 185 and 265 V and, therefore, favouring the use of extension cords or power supplies. Another important effect is that a power source equipped with this device consumes much less energy from the grid and allows it to be used on smaller circuit breakers (e.g. 16 A).



Flexible Voltage

This technology extends the supply voltage range of the PFC from 85 to 265 V (185 to 265 V for a standard PFC). They can therefore be used on 110 V or 230 V electrical networks.



Protect 400

Power sources equipped with this technology are able to withstand occasional or permanent voltage variations on the electrical network up to 400 V (lightning, engine-driven sets, load shedding, etc.).



Anti-Dust

In this type of design, the ventilation corridor is isolated from the electronic parts, which greatly reduces contact with external dust.



Mechanised cutting

Can be connected to a CNC cutting table.



Internal air compressor

Eliminates the need for a nearby compressed air source.



Auto AIR

Automatic management of air pressure and flow for optimal cutting.



Open sheet mode

Ideal for cutting work on perforated sheets



Marking mode

Ideal for surface marking and part identification.



Gouging

Removal of metal in an efficient, precise and clean manner

EASYCUT K25 & K35 PFC

Built-in air compressor



MADE IN FRANCE



Compressor inside

15 mm **1** **230** **PFC** **P400** **AD** **K35**

With a cutting capacity of up to 15 mm, the EASYCUT K25 and K35 PFC are manual plasma cutting machines with a built-in compressor. In the absence of compressed air, they are the perfect tool for any construction site.

- The internal compressor eliminates the need for an external air compressor and filter.
- No HF arc ignition to avoid electromagnetic interference.
- Equipped with a 4 m torch with trigger safety device to prevent accidental or unintentional triggering.
- Internal air filter with automatic drain to prevent condensation in the torch (K35 PFC).
- Storage compartment for consumables (K35 PFC).

15 mm **1** **110** **230** **PFC FV** **P400**

EASYCUT 30 FV

Designed for body shops



MADE IN FRANCE

Specifications

	EASYCUT K25	EASYCUT K35 PFC
Power Supply	230 V 1 ph, 50/60 Hz	
Fuse	16 A	
Current range	10-25 A	10-35 A
Duty cycle @ 60%	15 A / 86 V	26 A / 90.4 V
EN 60974-1 (40°C) @ 100%	-	-
Compressor (noise level)	60 -70 db	
Dimensions L x W x H	41 x 20 x 36 cm	45 x 26 x 36 cm
Weight	15 kg	18.5 kg
Original torch	TPT 25 (4 m)	TPT 35 (4 m)

Performance

	EASYCUT K25	EASYCUT K35 PFC
Recommended cut (Clean cut)	Steel 6 mm Stainless steel / Alu 4 mm	10 mm
Maximum cut (Separation)	Steel 8 mm Stainless steel / Alu 6 mm	15 mm
		10 mm

Options & Accessories

TPT 25 torch consumables kit	070721
TPT 35 torch consumables kit	080782
Compass kit (Ø 10 >134 cm)	040205

Ordering information

EASYCUT K25 + accessories TOPARCTPT 25 torch, 4 m + 2 m earth cable	068063
EASYCUT K35 PFC + accessories TOPARCTPT 35 torch, 4 m + 2 m earth cable	080768

Specifications

Power Supply	230 V 1 ph, 50/60 Hz	110 V 1 ph, 50/60 Hz
Fuse	16 A	32 A
Current range		10-30 A
Duty cycle @ 60%	23 A / 89.2 V	19 A / 87.6 V
EN 60974-1 (40°C) @ 100%	20 A / 88 V	15 A / 86 V
Recommended air flow rate	115 L/min	
Recommended air pressure	2.5 > 9 bar	
Dimensions L x W x H	45 x 28 x 20 cm	
Weight	11 kg	
Original torch	TPT 40 (4 m)	

Performance

Recommended cut (Clean cut)	Steel 10 mm Stainless steel / Alu 8 mm
Maximum cut (Separation)	Steel 15 mm Stainless steel / Alu 10 mm

Options & Accessories

TPT 40 torch consumables kit	039957
Dehumidifier filter	039728
PLASMA 600 trolley	040298
Manual plasma torch TPT 40 - 4 m - with consumables	060753
Compass kit (Ø 10 >134 cm)	040205

Ordering information

EASYCUT 30 FV + accessories TOPARCTPT 40 torch, 4 m + 2 m earth cable	013858
--	--------

EASYCUT 25 & 40

Ultra compact



20 mm
1 PHASE
230 VOLTS

The ultra-compact EASYCUT 25 and 40 plasma cutters are ideal for easily cutting all types of metal up to 20 mm thick. With a power rating of up to 40 A, they excel at low-current precision cutting. Ideal for the workshop, they offer true portability without sacrificing cutting performance.

- Compact and lightweight, they provide excellent mobility.
- Easy-to-use control panel with a single potentiometer for adjusting the cutting intensity.
- No HF arc ignition to avoid electromagnetic interference.
- Manual air pressure adjustment (2.5 < 6.5 bar) with front bar graph.
- Equipped with a 4 m detachable torch with trigger safety device.

Specifications

	EASYCUT 25	EASYCUT 40
Power Supply	230 V 1 ph, 50/60 Hz	
Fuse	16 A	16 A
Current range	10-25 A	10-40 A
Duty cycle @ 60% EN 60974-1 (40°C)	15 A / 86 V	10 A / 84 V
@ 100%	10 A / 84 V	-
Recommended air flow rate	115 L/min	
Recommended air pressure	2.5 > 6.5 bar	
Dimensions L x W x H	42 x 15 x 30 cm	
Weight	7.8 kg	8 kg
Original torch	TPT 25 (4 m)	TPT 40 (4 m)

Performance

	EASYCUT 25	EASYCUT 40
Recommended cut (Clean cut)	Steel 6 mm	15 mm
Stainless steel / Alu	4 mm	12 mm
Maximum cut (Separation)	Steel 8 mm	20 mm
Stainless steel / Alu	6 mm	15 mm

Options & Accessories

TPT 25 torch consumables kit	070721
TPT 40 torch consumables kit	039957
Dehumidifier filter	039728
PLASMA 600 trolley	040298
Manual plasma torch TPT 40 - 4 m - with consumables	060753
Compass kit (Ø 10 > 134 cm)	040205

Ordering information

EASYCUT 25 + accessories TOPARC TPT 25 torch, 4 m + 2 m earth cable	065543
EASYCUT 40 + accessories TOPARC TPT 40 torch, 4 m + 2 m earth cable	029743



CUTTER 45 & 70 CT

Portable for industry



MADE IN FRANCE



The professional-grade plasma cutters, the CUTTER 45 CT (single phase) and 70 CT (three phase) can cut metal up to a thickness of 35 mm. The CNC interface and the automatic, AT-70, industrial torch enable a completely mechanised operation.

- Easy-to-use control panel with a single potentiometer for adjusting the cutting intensity.
- Three working modes: Cutting, trigger-lock cutting and cutting of perforated sheets.
- Pre-wired for use on automatic cutting table (optional CNC-1 analogue kit).
- No HF arc ignition to avoid electromagnetic interference.
- Manual air pressure adjustment (4.1 < 6.5 bar) with front bar graph.
- MT-70 premium torch designed to withstand impact and heat.




	CUTTER 45 CT*		CUTTER 70 CT
	230 V	110 V	400 V
Recommended cut (Clean cut)	Steel Stainless steel / Alu	25 mm 15 mm	10 mm 8 mm
Maximum cut (Separation)	Steel Stainless steel / Alu	30 mm 20 mm	15 mm 10 mm
Drilling	Steel Stainless steel / Alu	12 mm 6 mm	5 mm 3 mm
Gouging	Withdrawal rate	-	4.8 kg/h

* with MT-70 torch

Recommended cut

CUTTER 45 CT CUTTER 70 CT

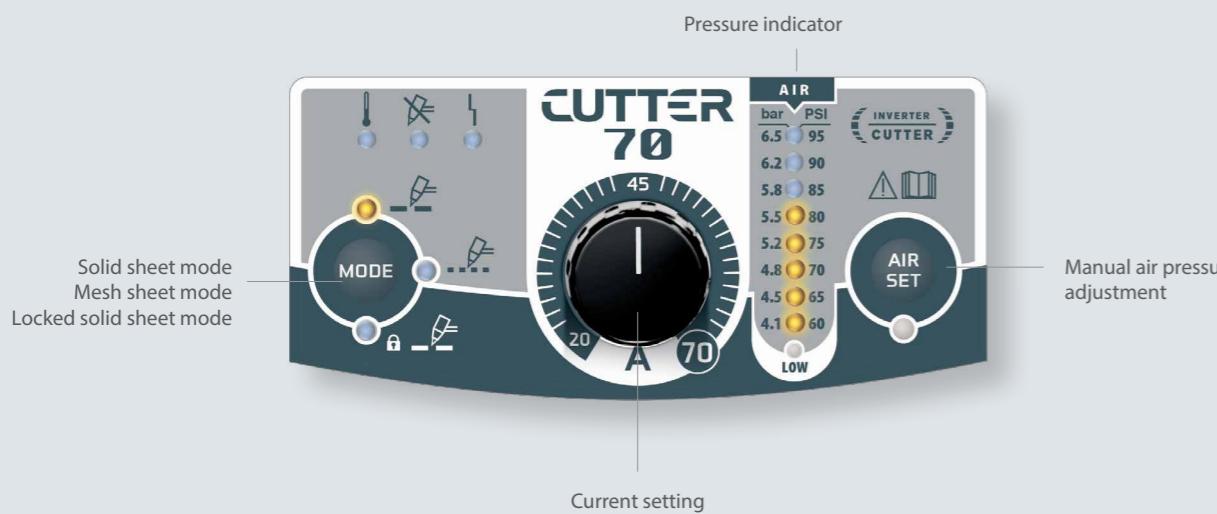

Specifications

	CUTTER 45 CT		CUTTER 70 CT	
Work mode	Cutting		Cutting	Gouging
Power Supply	230 V 1 ph, 50/60 Hz	110 V 1 ph, 50/60 Hz	400 V 3 ph, 50/60 Hz	
Fuse	16 A	32 A	16 A	
Current range	10-45 A	10-30 A	20-70 A	
Duty cycle EN 60974-1 (40°C)	@ 60% 41 A / 96.4 V	@ 100% 32 A / 92.8 V	21 A / 88.4 V 17 A / 86.8 V	70 A / 108 V 55 A / 102 V 45 A / 118 V
Recommended air flow rate	115 L/min	185 L/min	270 L/min	
Recommended air pressure	5 > 7 bar			
Dimensions L x W x H	48 x 37 x 23 cm		52 x 40 x 26 cm	
Weight	15 kg		22 kg	
Original torch	MT-70 (6 m) or TPT 40 (4 m)		MT-70 (6 m)	

Options & Accessoires

MT-70 torch consumables kit	061613
TPT 40 torch consumables kit	039957
Dehumidifier filter	039728
MT-70 manual plasma torch - 12 m - without consumables	037519
Automatic AT-70 plasma torch - 6 m - without consumables	037526
Automatic AT-70 plasma torch - 12 m - without consumables	037533
CNC-1 Analogue Kit for cutting table connection	039988
Filter with stainless steel grid (630 µm filtration)	046580
Cutting / chamfering / torch guidance kit	038653
TPT 40 Plasma Torch Compass Kit (Ø 10 > 134 cm)	040205
MT-70 Plasma Torch Compass Kit (Ø 40 > 82 cm)	037984

Ordering information

CUTTER 45 CT + 2 m earth cable	014787
CUTTER 45 CT & accessories TOPARC TPT 40 torch, 4 m + 2 m earth cable	013629
CUTTER 70 CT + 4 m earth cable	013636
CUTTER 70 CT & accessories TOPARC MT-70 torch, 6 m + 4 m earth cable	013841

NEOCUT 105 & 125

State-of-the-art technology



MADE IN FRANCE



With a high capacity for manual or mechanised cutting, NEOCUTs are the ideal solution in industrial environments. Its 100% duty cycle up to 125 A enables it to cut parts up to 57 mm thick. Equipped with automatic air pressure management, they offer optimal cutting quality throughout the life of the consumables.

- Automatic management of pressure and air flow according to the set current.
- Six working modes: cutting, trigger-lock cutting, gouging, triggerlock gouging, cutting of perforated sheets and marking.
- Marking mode, ideal for tracing and identifying parts.
- No HF arc ignition to avoid electromagnetic interference.
- Pre-wired for use on automatic cutting table (optional analogue/digital CNC kit).
- Monitored wear and tear of consumables (nozzle and electrode).
- Easy software updates via USB cable with no tools or disassembly required.
- OLED display and multilingual interface: easy to use, with all settings at the touch of a button.



Performance		NEOCUT 105	NEOCUT 125
Recommended cut (Clean cut)		Steel 35 mm	40 mm
		Stainless steel / Alu 30 mm	40 mm
Maximum cut (Separation)		Steel 50 mm	57 mm
		Stainless steel / Alu 40 mm	57 mm
Drilling		Steel 20 mm	25 mm
		Stainless steel / Alu 18 mm	25 mm
Gouging	Withdrawal rate	8 kg/h	12 kg/h


Specifications

	NEOCUT 105	NEOCUT 125
Work mode	Cutting Gouging	Cutting Gouging
Power Supply		400 V - 3 ph, 50/60 Hz
Fuse	32 A	63 A
Current range	20-105 A	20-125 A
Duty cycle	@ 60% -	105 A / 142 V
EN 60974-1 (40°C)	@ 100% 105 A / 122 V	90 A / 136 V 125 A / 130 V 125 A / 150 V
Recommended air flow rate		305 L/min
Recommended air pressure		5 > 9 bar
Dimensions L x W x H		69 x 40 x 61 cm
Weight	33 kg	36 kg
Original torch		MT-125 (6 m)

Options & Accessories

Consumables kit 45 / 65 / 85 A MT-125 torch	039537
Consumables kit 85 / 105 A MT-125 torch	064720
Consumables kit 105 / 125 A MT-125 torch	039544
Dehumidifier filter	039728
Skate trolley + bracket	037717
MT-125 manual plasma torch - without consumables	12 m - 039513
	6 m - 038479 12 m - 039520
	15 m - 069787 20 m - 069794
Automatic AT-125 plasma torch without consumables	6 m - 067479 12 m - 067486
	15 m - 069800 20 m - 069817
Automatic AT-160 plasma torch without consumables	039988
CNC-1 Analogue Kit for cutting table connection	064737
CNC-2 Digital kit for cutting table connections	068957
CNC-3 Digital Retrofit Kit	046580
Filter with stainless steel grid (630 µm filtration)	038653
Cutting / chamfering / torch guidance kit	

Recommended cut

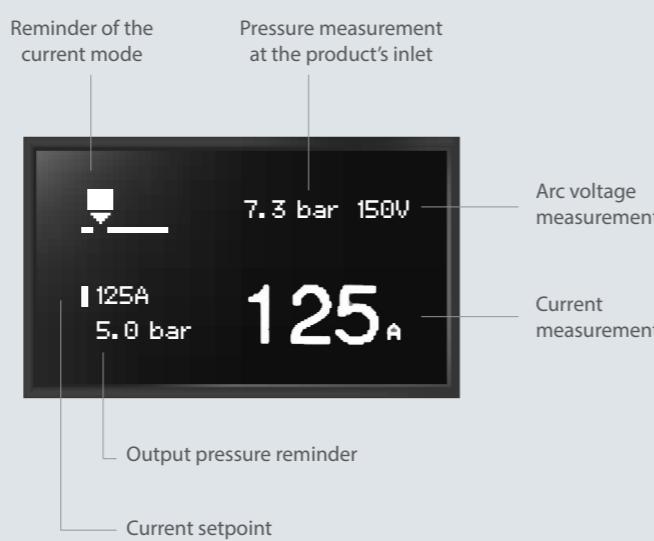

	NEOCUT 105	NEOCUT 125
NEOCUT + 4 m earth cable	063044	067431
NEOCUT + accessories TOPARC MT-125 torch, 6 m + 4 m earth cable	063112	067448

Torches - EASYCUT

Model	Series	Angle	Duty cycle 60%	Length 100%	Consumables	Part Number	Compatibility
	TPT 25	75°	25 A (35%)	15 A	4 m	including	068087 EASYCUT K25 EASYCUT 25
	TPT 35		35 A	-	4 m	including	080775 EASYCUT K35 PFC
	TPT 40		40 A	-	4 m	including	060753 EASYCUT 30 FV EASYCUT 40 CUTTER 45 CT

Consumables - EASYCUT

Torch model	Diffuse (x2)	Electrode (x10)	Tips (x10)	Nozzle (x4)	Consumables kit
Cutting	MT 25K	x1	040151	040182	MT 25K 039971
	TPT 25		040212	040182	TPT 25 070721
	TPT 35		080799	040182	TPT 35 080782
	TPT 40		040212	040236	TPT 40 039957

Packs - CUTTER CT / NEOCUT

	Earth cable	Manual torch	Automatic torch	CNC kit	Skate trolley	Diffuser	Electrode	Tips	Ohmic Nozzle	Deflector
--	-------------	--------------	-----------------	---------	---------------	----------	-----------	------	--------------	-----------

CUTTER 45 CT

	1 062962	■	2 m, 10 mm ²	MT-70, 6 m 037502				x1	x1	x1	x1	x1
	2 062979	■		MT-70, 12 m 037519				x1	x3	x3	x1	x1
	3 062986	■		AT-70, 12 m 037533	Analog 039988			x1	x5	x5	x1 (Ohmic) 037618	x1 037649

CUTTER 70 CT

	1 013841	■	4 m, 10 mm ²	MT-70, 6 m 037502				x1	x1	x1	x1	x1
	2 014589	■		MT-70, 6 m 037502				x1	x3	x3	x1	x1
	3 014596	■		MT-70, 12 m 037519				x1	x3	x3	x1	x1
	4 014619	■		AT-70, 12 m 037533	Analog 039988			x1	x5	x5	x1 (Ohmic) 037618	x1 037649

NEOCUT 105

	1 063112	■	4 m, 16 mm ²	MT-125, 6 m 039506				x1	x1	x1	x1	x1
	2 065871	■		MT-125, 6 m 039506				x2	x3	x6	x3	x3
	3 065888	■		MT-125, 12 m 039513				x2	x3	x6	x3	x3
	4 065995	■		AT-125, 12 m 125A 60% 039520	Analog 039988			x1	x5	x5	x1 (Ohmic) 039445	x1 039308
	5 068186	■		AT-125, 12 m 125A 60% 039520	Digital 064737			x1	x5	x5	x1 (Ohmic) 039445	x1 039308

NEOCUT 125

	1 067448	■	4 m, 25 mm ²	MT-125, 6 m 039506				x1	x1	x1	x1	x1
	2 068193	■		MT-125, 6 m 039506				x1	x3	x6	x1	x1
	3 068209	■		MT-125, 12 m 039513				x1	x3	x6	x1	x1
	4 068216	■		AT-125, 12 m 125A 60% 039520	Analog 039988			x1	x5	x5	x1 (Ohmic) 039445	x1 039308
	5 068223	■		AT-125, 12 m 125A 60% 039520	Digital 064737			x1	x5	x5	x1 (Ohmic) 039445	x1 039308
	6 073463	■		AT-160, 12 m 125A 100% 067486	Analog 039988			x1	x5	x5	x1 (Ohmic) 067585	x1 067608
	7 073470	■		AT-160, 12 m 125A 100% 067486	Digital 064737			x1	x5	x5	x1 (Ohmic) 067585	x1 067608

CUTTER CT / NEOCUT torch

Model	Series	Angle	Duty factor 60%	Duty factor 100%	Length	Consumables	Part Number	Compatibility
	MT-70	70 A (50%)	50 A		6 m	not including	037502	CUTTER 45 CT
					12 m		037519	CUTTER 70 CT
	MT-125	125 A	105 A		6 m		039506	NEOCUT 105
					12 m		039513	NEOCUT 125

EASYFIT torch



Series	Model	Angle	Duty factor 60%	Duty factor 100%	Length	Consumables	Part Number	Compatibility						
A	MT-70	-	-	-	6 m	not including	074668	CUTTER 45 CT CUTTER 70 CT NEOCUT 105 NEOCUT 125						
					12 m		074675							
	MT-125	90°	125 A	105 A	-		074644	NEOCUT 105 NEOCUT 125						
							074651							
B	MT-125	15°	-	-	130 cm		074620							
							074637							
	MT-125	90°	125 A	105 A	-		074583	CUTTER 45 CT CUTTER 70 CT						
							074606	NEOCUT 105 NEOCUT 125						
C	MT-70	75°	70 A (50%)	50 A	-		074590	CUTTER 45 CT CUTTER 70 CT						
							074613	NEOCUT 105 NEOCUT 125						
	MT-125													
D	MT-70	75°	125 A	105 A	-									
	MT-125													
E	MT-70	15°	70 A (50%)	50 A	-									
	MT-125													

CUTTER CT / NEOCUT consumables

Torch model	Caliber	Diffuser (x1)	Electrode (x5)	Tips (x5)	Nozzle (x1)	Cutting shield (x1)	Consumables kit
MT-70	20-50 A	x1	x3	037564 short	x3 x3	x1	037625
	70 A	x1	037557	067196 long	x3	037601	20-50 A 061613
			x3	037564 short	x3	x1	20-70 A 037540
				067189 long		x1	
	Precision cut 45 A	039131		039155		039216	039322
	45 A	x1	039131		x3	039162	45/65/85 A 039537
MT-125	65 A	x1	x3		x3	039179	x1
	85 A	x1	x3		x3	039186	x1
	105 A	x1	039148	x3	x3	039193	x1
	125 A	x1	x3	039209	x1	039223	x1
							039247
Torch model	Caliber	Diffuser (x1)	Electrode (x5)	Tips (x5)	Nozzle (x1)	Gouging shield (x1)	
MT-70	70 A	037557	037564	037595	037601	037632	
	65-85 A	039131		039261	039216		
	105 A	039148	039155	039278		039223	
	125 A			039285			039254

Difficult-access consumables

Torch model	Caliber	Diffuser (x1)	Electrode (x3)	Nozzle (x1)	Ring (x3)	Tips (x5)	Cutting shield (x1)	a b
MT-70	20-45 A	037557	074682	074859	074897	074767	074910	76 mm 122 mm
	70 A							
	20-45 A	039131	074699	074866	074897	074767	074910	82 mm 131 mm
	70 A							
	100 A	039148				074774		
						074781		
MT-70	70 A	037557	074682	074859	074897	074798	074927	76 mm 122 mm
	70 A	039131				074798		
	100 A	039148	074699	074866	074897		074927	82 mm 131 mm
							074804	

Flat cutting consumables

Torch model	Caliber	Diffuser (x1)	Electrode (x5)	Nozzle (x1)	Tips (x5)	Retaining ring (x2)	
MT-70	40-70 A	074736	074705	074873	074811	074903	
	40-70 A	074743	074712		074828		
	80-125 A	074750	039155		074835		

Automatic torch

Model	Series	Duty factor		Length		Ø	Consumables	Part Number	Compatibility			
	AT-70	70 A (50%)	50 A	6 m	127 mm	Ø 35 mm	not including	071865	CUTTER 45 CT CUTTER 70 CT			
				6 m				037526				
		125 A	105 A	12 m		Ø 35 mm		037533				
				6 m				038479				
				12 m				039520	NEOCUT 105 NEOCUT 125			
	AT-125			15 m		240 mm		069787				
				20 m				069794				
				6 m				067479				
				12 m				067486				
				15 m				069800				
	AT-160	160 A	125 A	20 m		Ø 44.5 mm		069817	NEOCUT 125			

Consumables

Torch model	Caliber	Diffuser (x1)	Electrode (x5)	Tips (x5)	Nozzle tip (x1)	Ohmic nozzle tip (x1)	Shield cap (x1)	
AT-70	Cutting	20-50 A	037557	037564	037571	037601 or 037618	037649	
		70 A			037588			
AT-125	Cutting	Precision cut 45 A	039131	039155	039315	039216 or 039339	037496	
		45 A			039162			
		65 A			039179			
		85 A			039186			
		105 A			039193	039223 or 039445	039308	
		125 A			039209			
		Precision cut 45 A			037516			
AT-160	Cutting	45 A	067509	037493	067523	-	067578	067592
		65 A			067530			
		85 A			067547			
		105-125 A			067554			
		160 A			067561			
		Precision cut 45 A						

Accessories

	Dehumidifier filter 039728 Filter and cartridge 039735 Cartridges (x4)
	Dust filter 046580 CUTTER 70 CT - NEOCUT 105/125
	RC-PLASMA Remote control ON/OFF switch for mechanised plasma torch 069596 CUTTER 45/70 CT - NEOCUT 105/125

Cutting guides

	Caliper kit #1 040205 compatible with TPT 25 / TPT 40 / MT 25K / TPT 35 / MT 45 torches 040199 Guide carriage
	Caliper kit #2 037984 compatible with MT-70 / MT-125 torches 037977 Guide carriage
	Cutting / chamfering / guiding kit 038653 compatible with MT-70 / MT-125 torches

Trolleys

040977 EASYCUT K35F	073593 NEOCUT 105/125	037717 NEOCUT 105/125	040298 EASYCUT K25/K35 PFC EASYCUT 30FV - 25/40 CUTTER 45 CT	051331 EASYCUT K25/K35 PFC EASYCUT 30FV - 25/40 CUTTER 45 CT	039568 EASYCUT K25/K35 PFC CUTTER 45 CT NEOCUT 105/125

CNC kits

Analogue CNC-1 039988 CUTTER 45/70 CT NEOCUT 105/125	Digital CNC-2 064737 NEOCUT 105/125	Retrofitted digital CNC-3 068957 NEOCUT 105/125

To learn more

INVEST IN THE
FUTURE

www.gys.fr



GYS 2024 catalogue
Welding & Cutting

GYS FRANCE

1, rue de la Croix des Landes
53941 SAINT-BERTHEVIN - France
Tél. : 02 43 01 23 60

www.gys.fr | contact@gys.fr



Made in France
since 1964